


A diagram illustrating the evolution of lighting tracks. On the left, a red ribbon-like track is shown in a wavy, non-linear path. A dotted line connects this to a solid black horizontal line. This line then transitions into a 3D rendering of a modern gallery space where a red track is installed in a wavy pattern across the ceiling, with various lighting fixtures attached to it.

EVOLUTION FROM  
POINT TO **LINE**

**INNOVATOR OF**  
THE FLEXIBLE TRACK LIGHTING SYSTEM

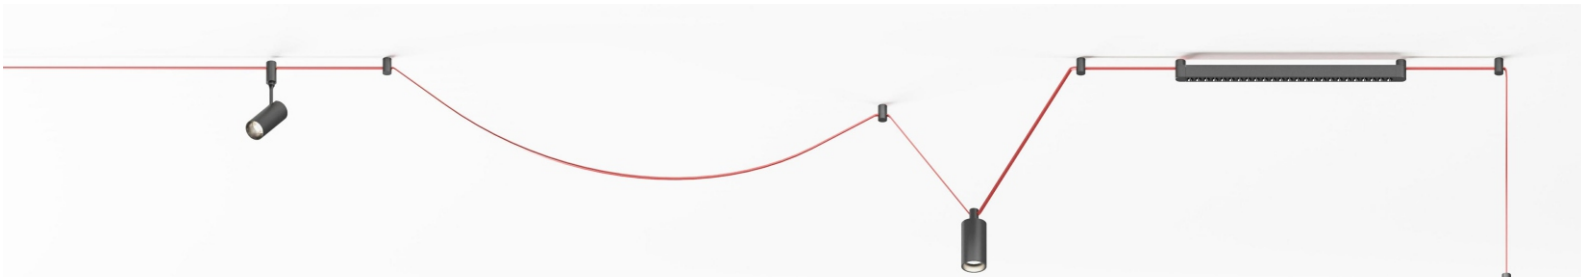

# COLOR BRIDGE series

A colorful, flexible lighting system

Unlimited connection .....  
Unlimited series  
Unlimited combinations





**BREAK & REBUILD**

# **COLOR BRIDGE** series

An open


modular lighting platform





Extremely flexible  
like water  
**Free flowing**

Flexible and tough track  
24V plug and play

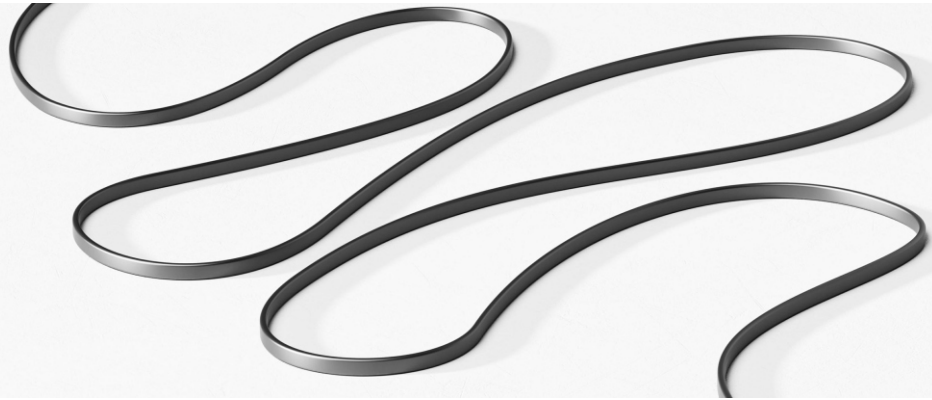



Infinitely changeable shapes



Unleash unlimited creativity

Implement the layout of  
hyperspace from **2D** to **3D**





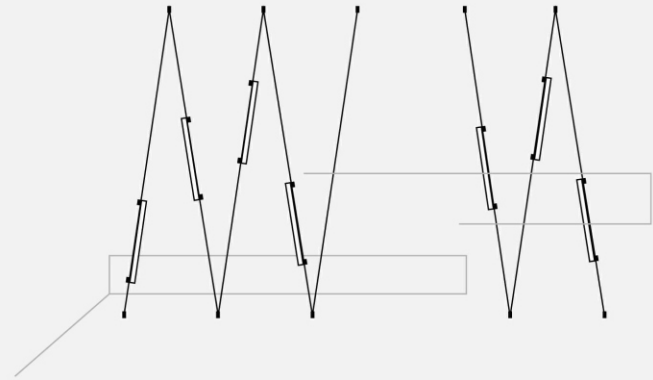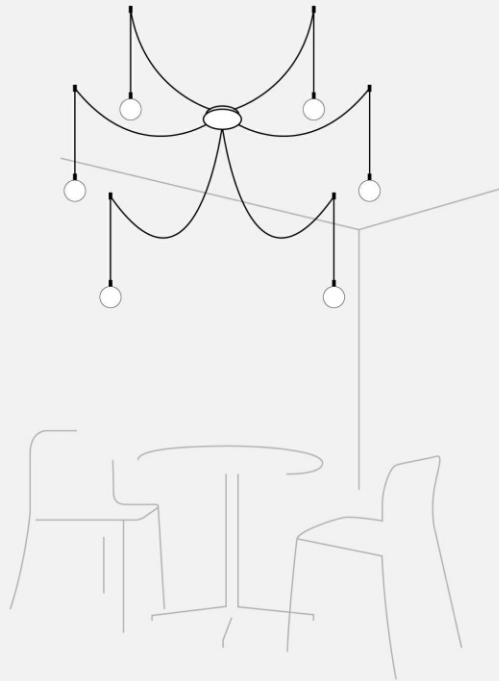

WHATEVER  
YOU WANT




The *fluidity* of light  
INSPIRE YOUR SPACE

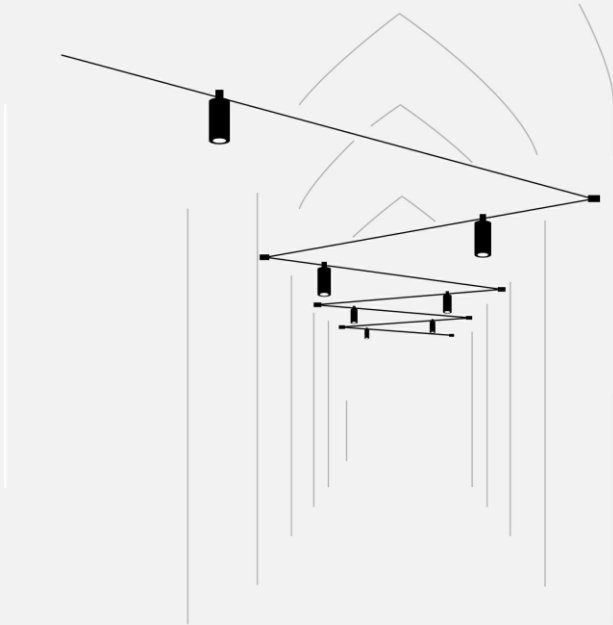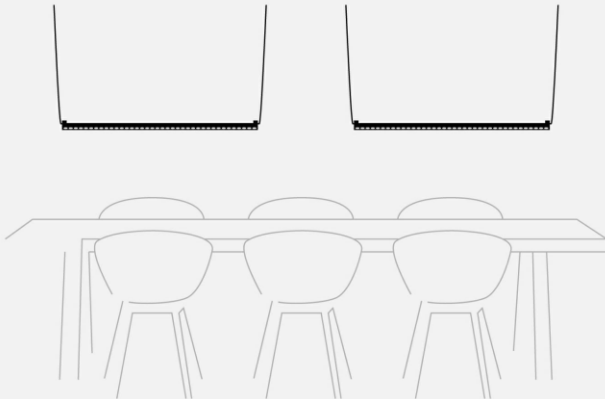


# Multiple modules

to meet

various scene changes

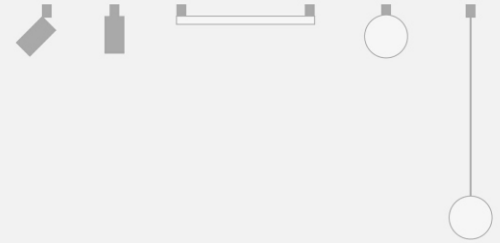

ACCENT LIGHTING/INDIRECT LIGHTING/DECORATIVE LIGHTING  
ALL KINDS OF LIGHTING FIXTURES ARE AVAILABLE

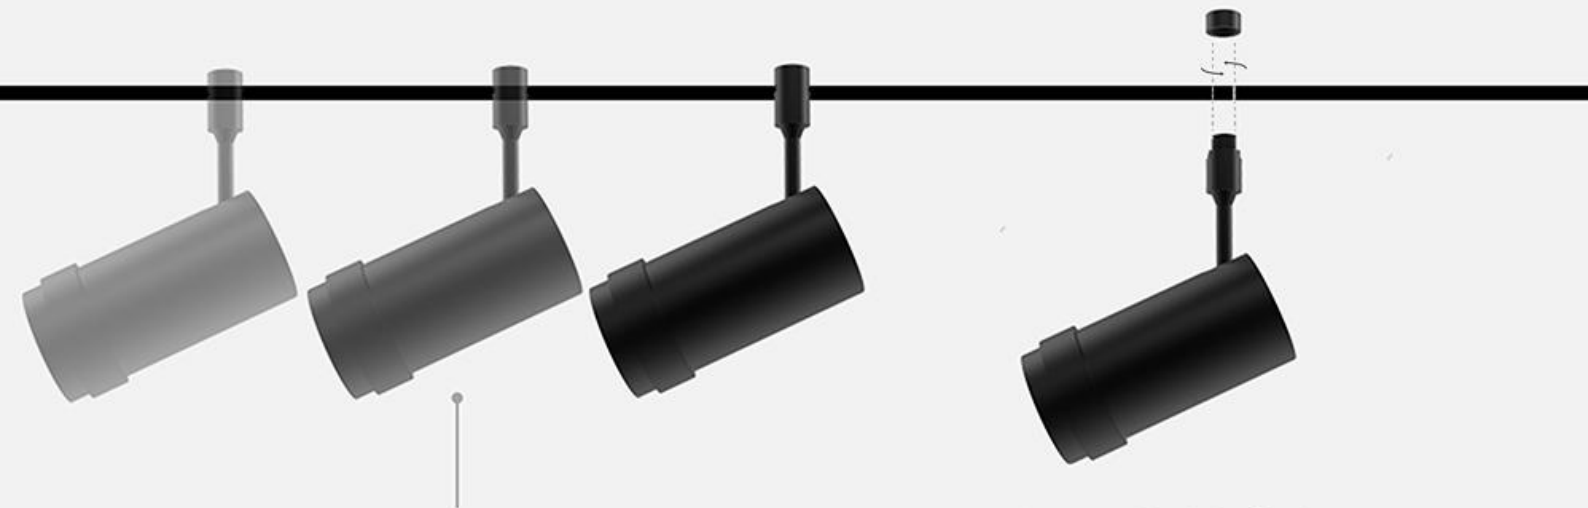

After installation, loosen the fixed cover to move the lighting fixture at any time.


Rotate and lock the fixed cover to the flexible track to power on.  
Safe and reliable.


## COLORFUL TRACK



Colorful flexible track suitable for various wall styles

\*Some of the track colors are customized

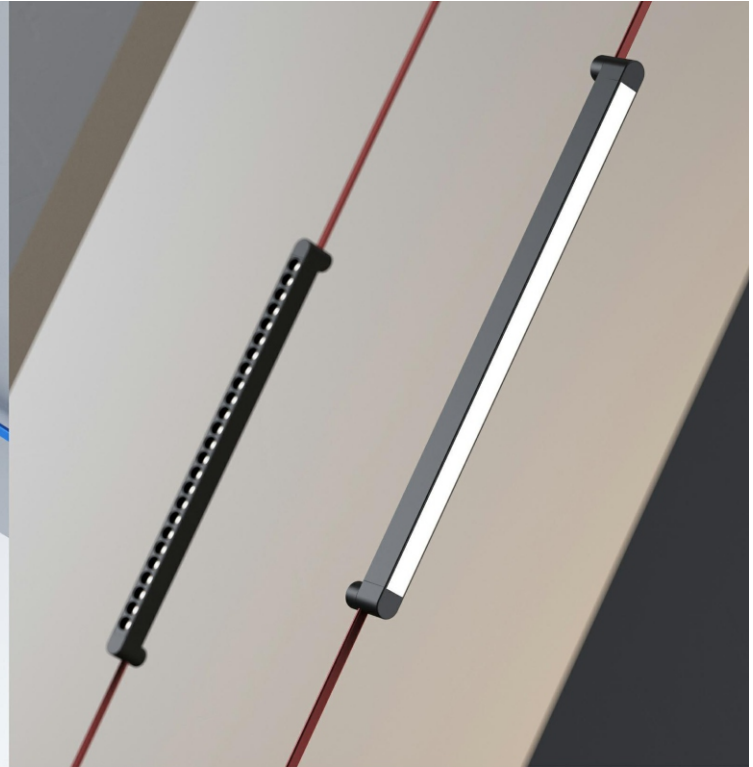

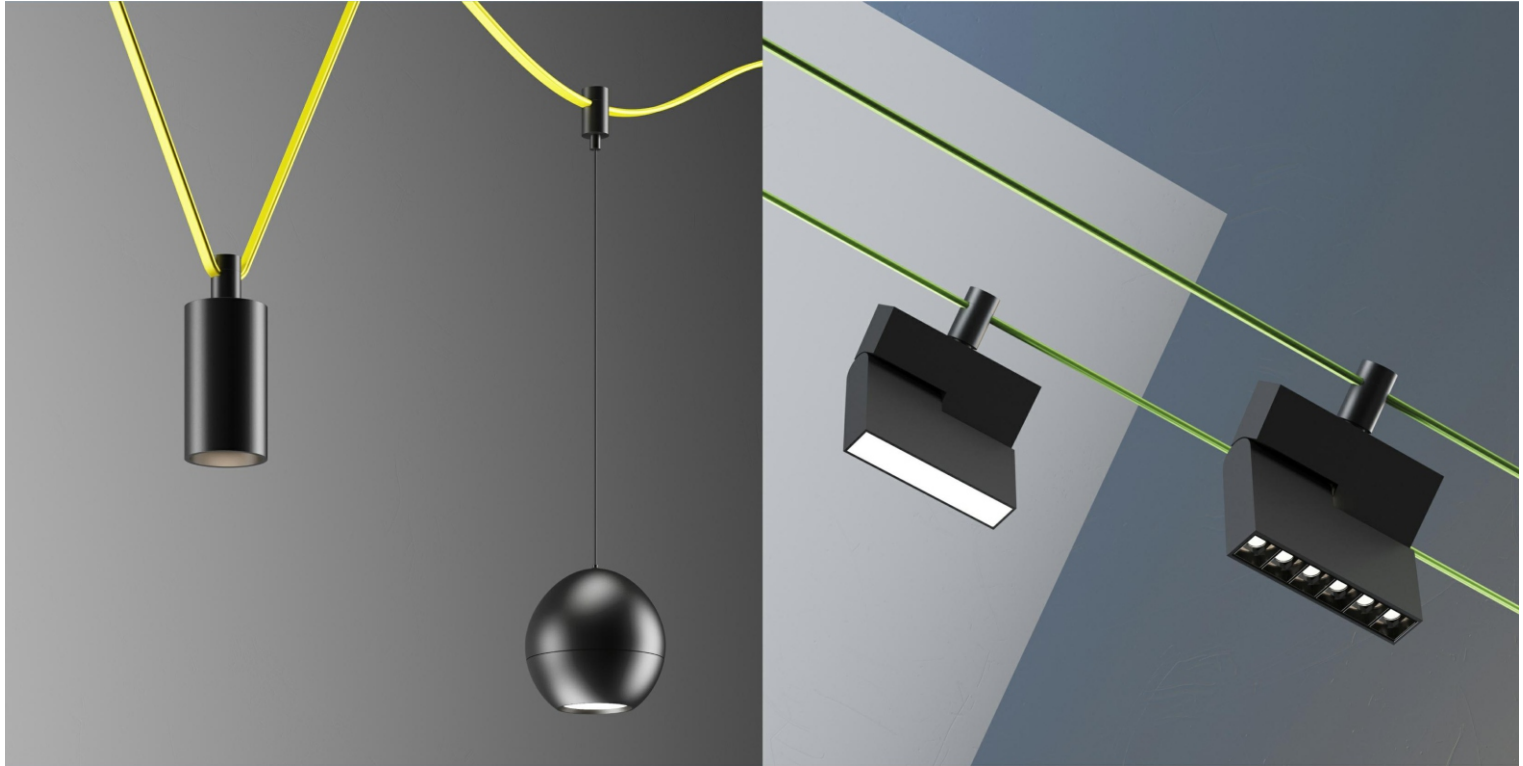



Versatile space  
**Embellishing home**  
Highlight the beauty of lines

THE COLOR BRIDGE SERIES CAN PROVIDE  
FUNCTIONAL LIGHTING + DECORATIVE LIGHTING  
FOR VARIOUS HOME SPACES










# SKY RAIL

[MORE](#)



**SKY RAIL** series  
Flexible modular  
lighting platform



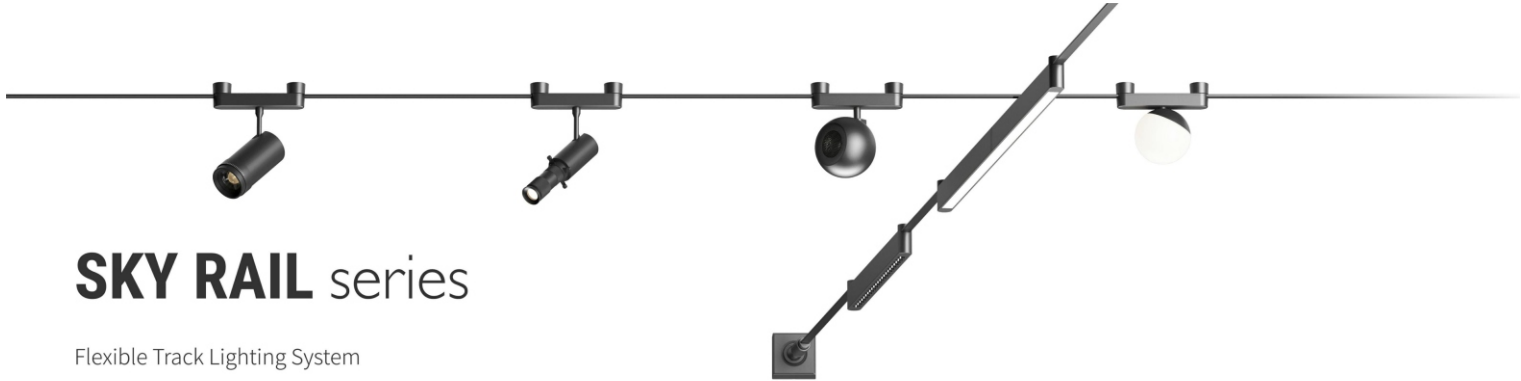

# SKY RAIL series

Flexible Track Lighting System

# Plug-and-play



# installation is portable

JUST TWO PLANES

TO FORM A MULTI-FUNCTIONAL FLEXIBLE LIGHTING SYSTEM



After installation, loosen the fixed cover to move the lighting fixture at any time.

**48V low voltage**

Rotate and lock the fixed cover to the flexible track to power on.  
Safe and reliable.




# Flexible



# Create a creative space


THE SPHERICAL ROTATION AXIS HELPS YOU  
CREATE EVER-CHANGING SHAPES

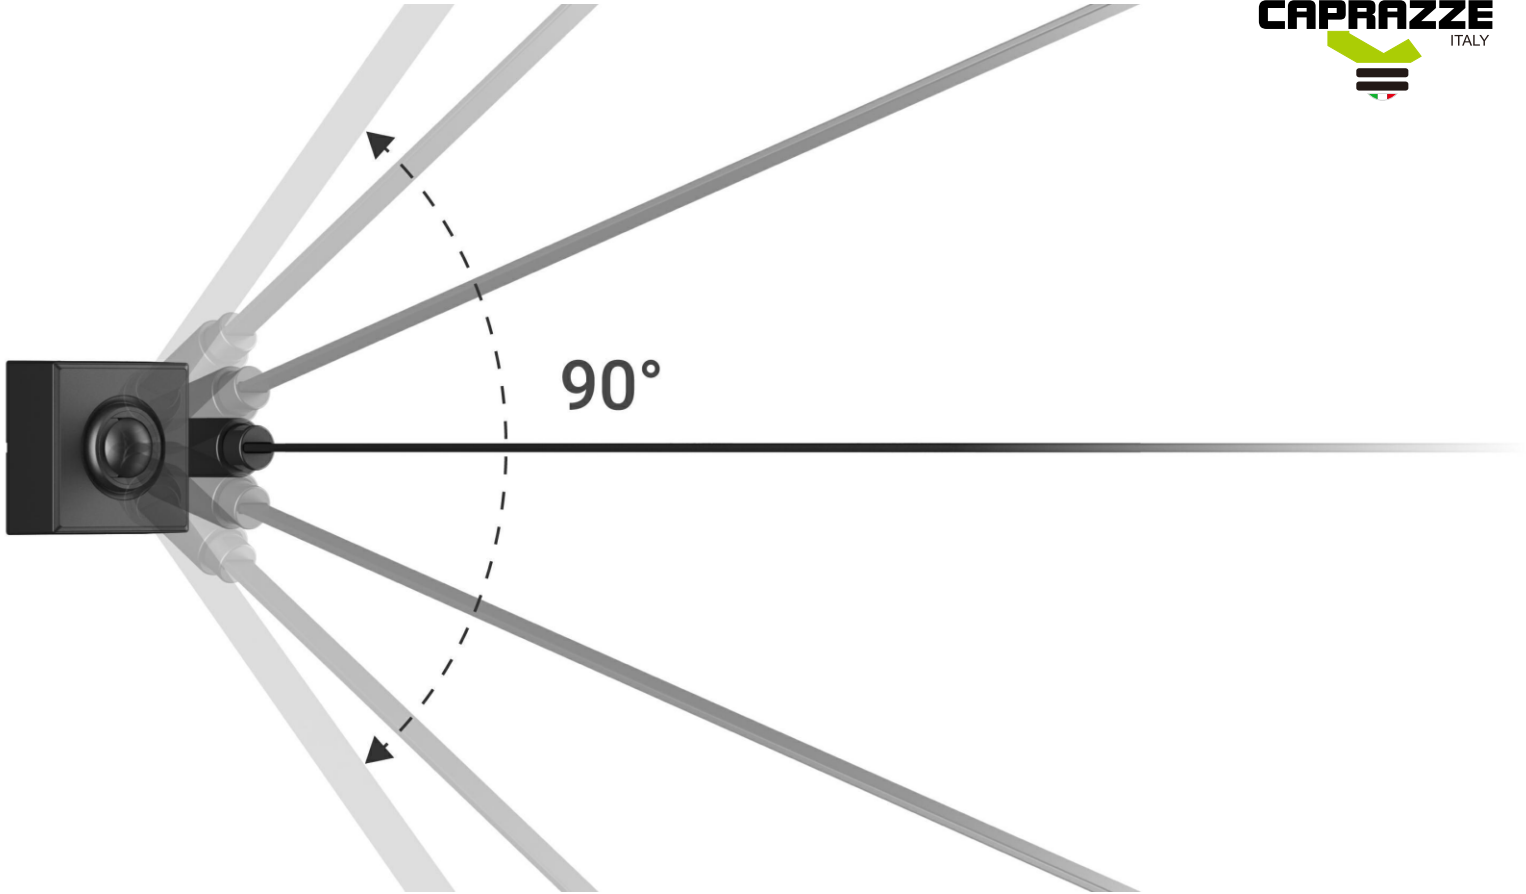







**BREAK** through spatial boundaries  
& **UNLEASH** unlimited imagination

**TWO SIDES, ONE LINE**  
LIGHTING IS JUST THAT SIMPLE

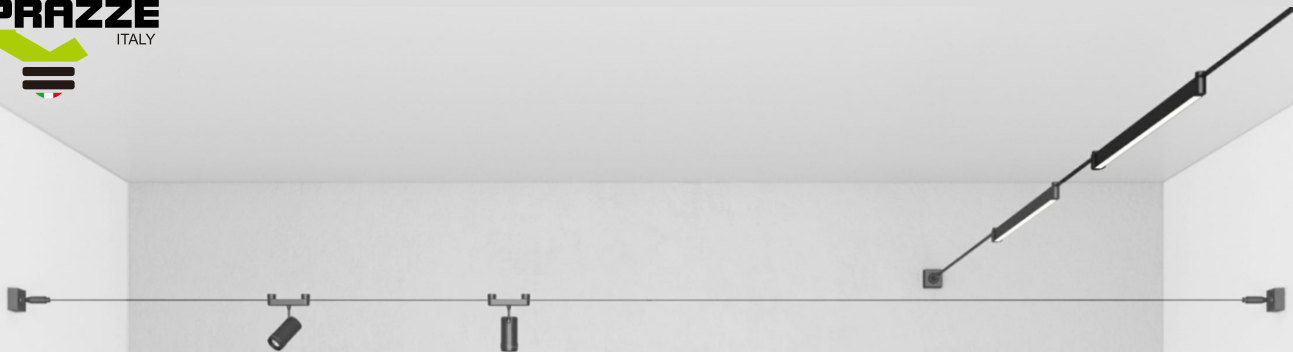


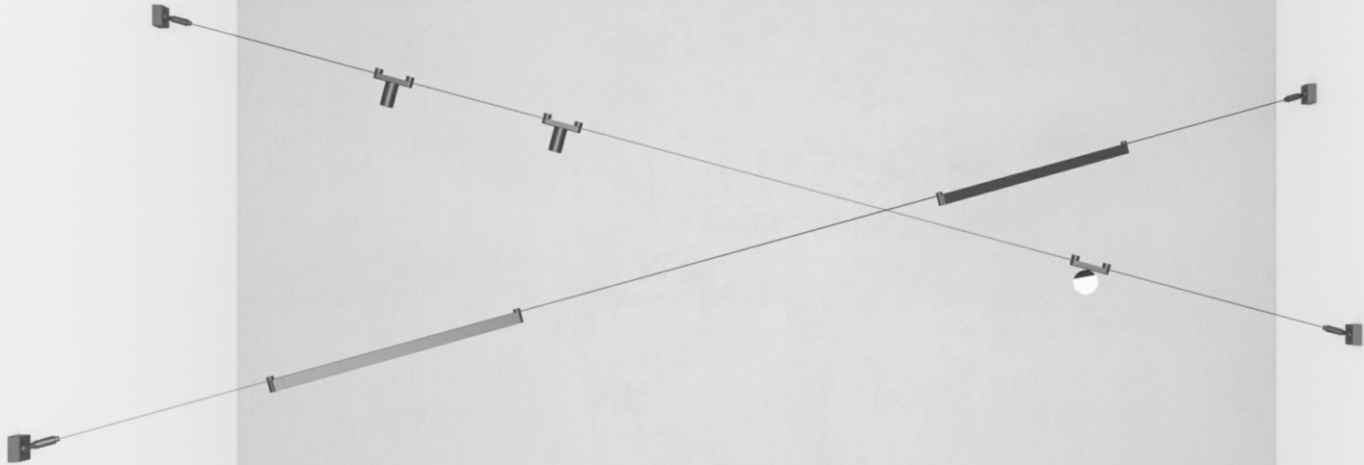


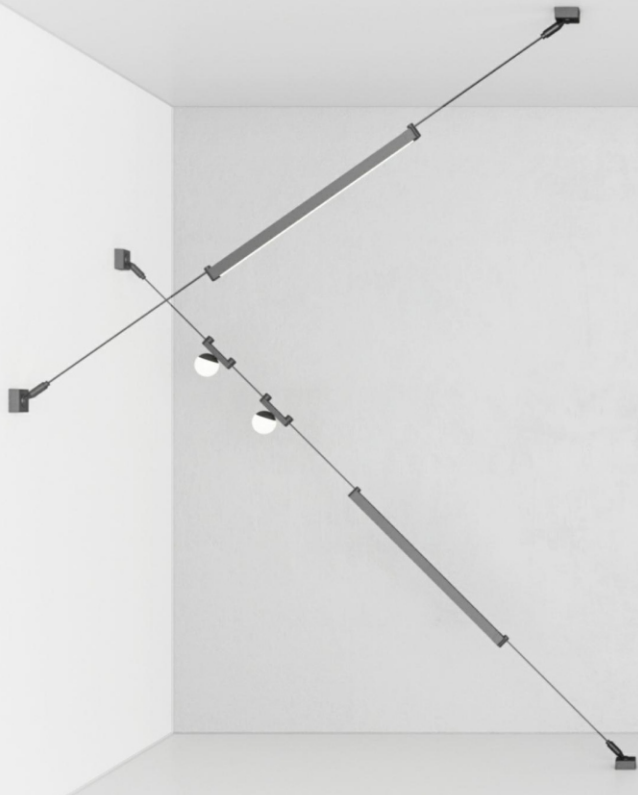

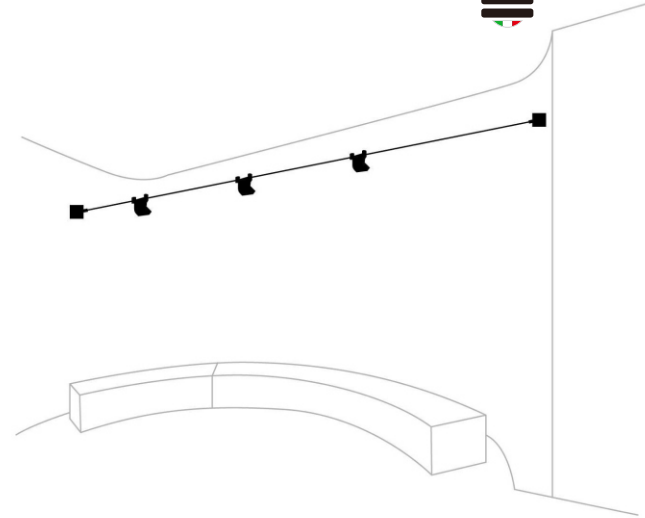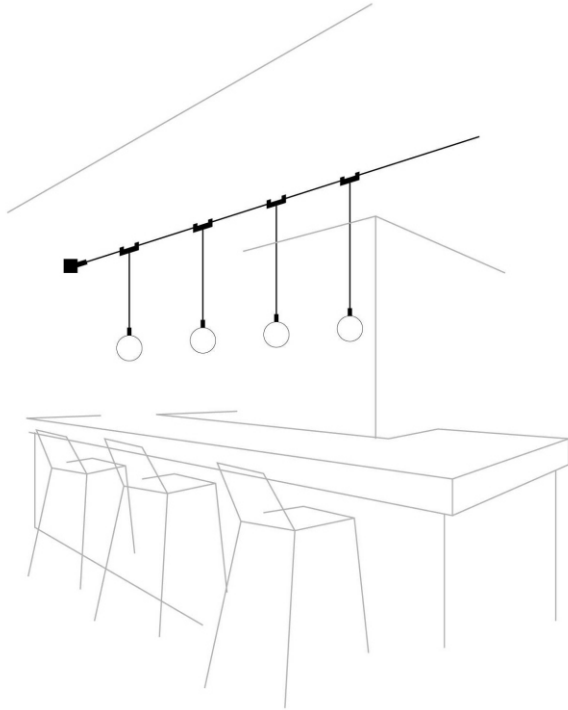

**FREE LAYOUT**

New Construction or Re-model

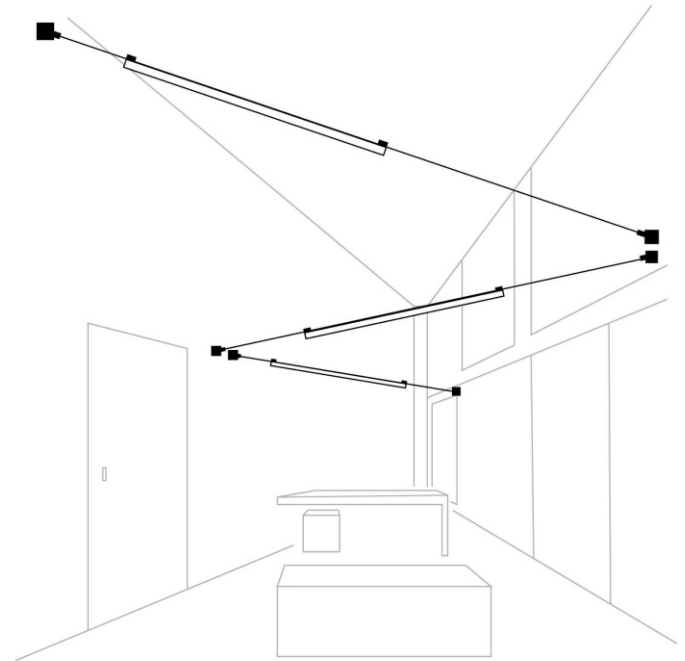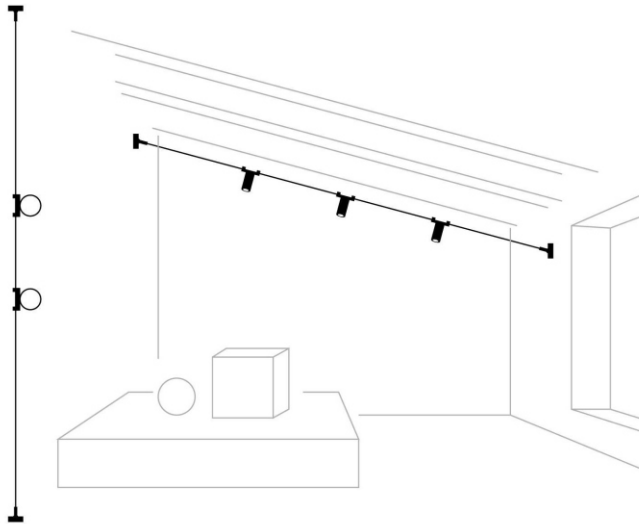



# Smart controlled lighting system



with adjustable brightness and CCT

Four wire core supports **DALI** systems

# INTELLIGENT LIGHT CONTROL


Single fixture and group control capability



# Multiple Products


to meet

various scene changes

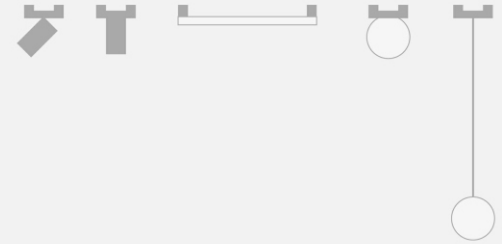

ACCENT LIGHTING/INDIRECT LIGHTING/DECORATIVE LIGHTING  
FIXTURE TYPES FOR ANY APPLICATION



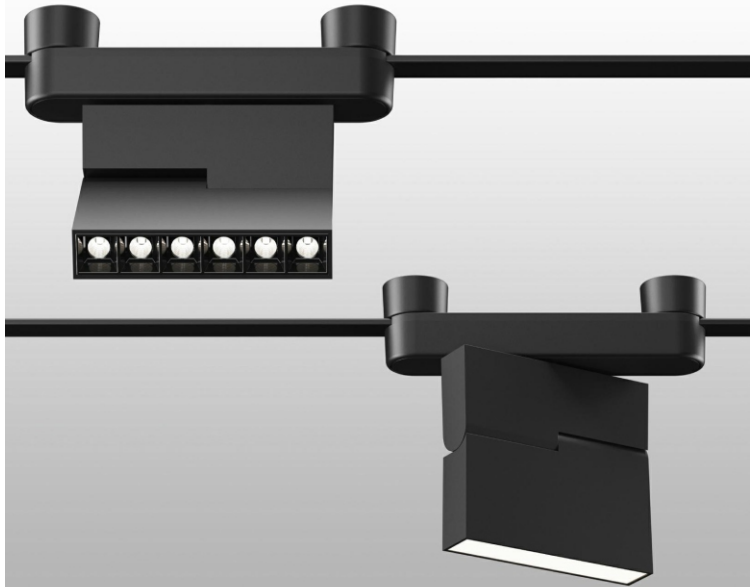



A minimalist design  
**Art blends**  
with reality

UNRESTRICTED INSTALLATION METHODS, RICH AND DIVERSE LIGHT SOURCE TYPES,  
DESIGNERS CAN FREELY CREATE THEIR OWN WORLD.












# Product Parameters

## --Color Bridge Series

## ➤ Color Bridge Series

It is a brand new flexible track and a safe low-voltage module. It supports DC24V or DC48V.

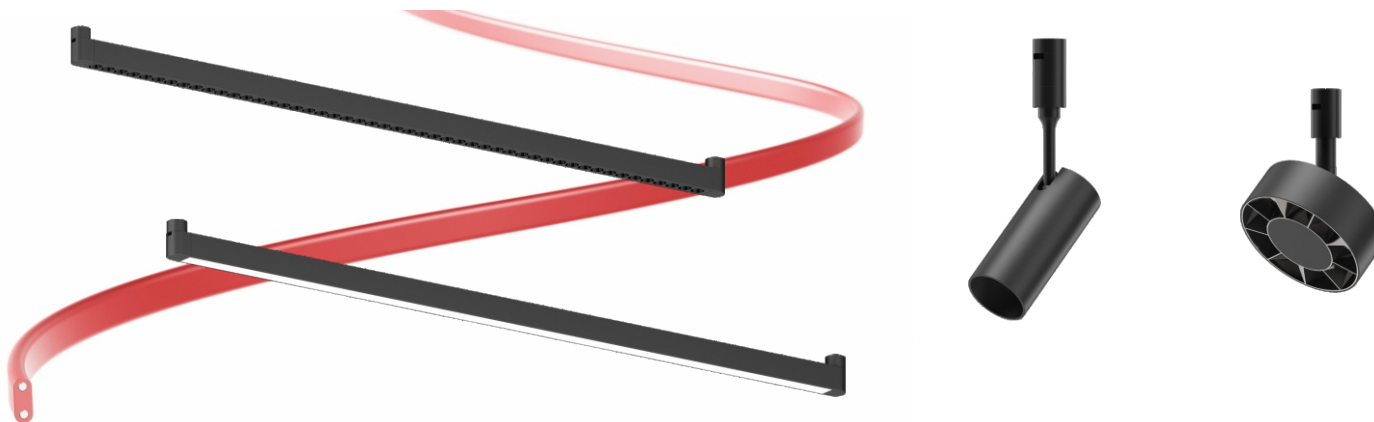


Total 7 colors optional for “Color Bridge” series track. Black/Grey/Red/Yellow/Blue/Green/Pink



# Color Bridge Series Components



Description : Fixed accessories  
Item No. : GDJ  
Size: D20mm H36mm  
Material: Aluminum



Description: Driver plate  
Usage: For surface-mounted, for  
build-in driver (No need for drivers  
fixed in ceiling)  
Size1: L180\*W110\*H50mm <150W  
Size2: L230\*W125\*H50mm <350W





Description: Flexible Track  
Item No.: DGX




DIY lamp module

# Easy installation for the "Color Bridge" series

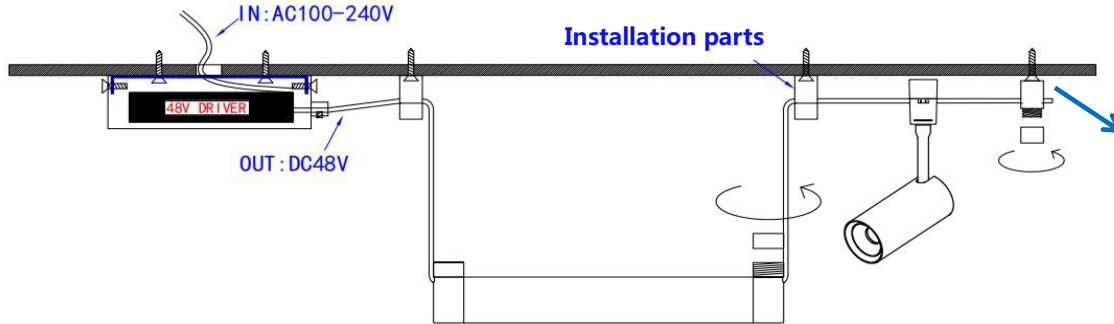

Normal Track  
10pcs per carton  
There are 600M, around 2.3CBM

# VS



Flexible Track  
100 meter each roll  
There are 2300M, around 0.9CBM

# DC48V Color Bridge Series Light module - floodlight



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQA-XTM-2J-20W	20W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L494*W23*H42.8mm
CQA-XTM-4J-40W	40W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L925*W23*H42.8mm
CQA-XTM-7J-70W	70W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L1572*W23*H42.8mm
CQA-XTM-9J-90W	90W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L2000*W23*H42.8mm

Advantages: Various length options, even glow, provide basic lighting

Application: Can be used for main lighting of ceiling, suspension line as office lighting, vertical as atmosphere, partition light, etc.

# DC48V Color Bridge Series Light module - Grille lamp





Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQA-XTD-R24T-20W	20W	24/36 °	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	L494 *W23 *H42.8mm
CQA-XTD-R48T-40W	40W	24/36 °	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	L925 *W23 *H42.8mm
CQA-XTD-R84T-70W	70W	24/36 °	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	L1572 *W23 *H42.8mm
CQA-XTD-R108T-90W	90W	24/36 °	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	L2000 *W23 *H42.8mm

Advantages : Optional length, deep anti-glare design, commonly used for accent lighting

Application: Can be used for the accent lighting of ceiling, can use suspension line as office lighting, dining table, tea table lamp, suspension light line integration, more beautiful, can also be multiple scattered design.


# DC48V Color Bridge Series Light module-Spot Light




Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-SP-021-7W	7W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D45*H100mm
CQP-SP-022-12W	12W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D55*H115mm
CQP-SP-023-18W	18W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D65*H135mm




# DC48V Color Bridge Series Light module - Spot Light



CQP-SP-011-12W



CQP-SP-012-18W




CQP-SP-013-24W

Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-SP-011-12W	12W	15°/24°/ 36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D50*H130mm
CQP-SP-012-18W	18W	15°/24°/ 36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D65*H156mm
CQP-SP-013-24W	24W	15°/24°/ 36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D76*H182mm

# DC48V Color Bridge Series Light module - Multifunctional Spot Light



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-SP-032-10W	10W	Adjustable 10°-55°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D55*H115mm
CQP-SP-033-18W	18W	Adjustable 10°-55°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D65*H135mm
CQP-SP-062-6W	6W	15°/24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D40*H100mm
CQP-SP-063-12W	12W	15°/24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D52*H120mm
CQP-SP-064-18W	18W	15°/24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D63*H140mm


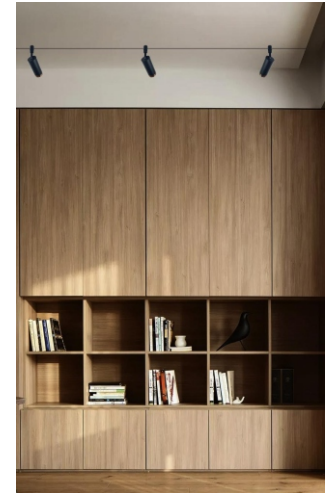


# DC48V Color Bridge Series Light module - Wall washer Light




Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-BXQD-21-6W	6W	24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L112 *W23*H87mm
CQP-BXQD-22-12W	12W	24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L220 *W23*H87mm
CQP-BXQM-11-6W	6W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L118 *W23*H87mm
CQP-BXQM-12-12W	12W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L231 *W23*H87mm

# DC48V Color Bridge Series Light module - Spot Light

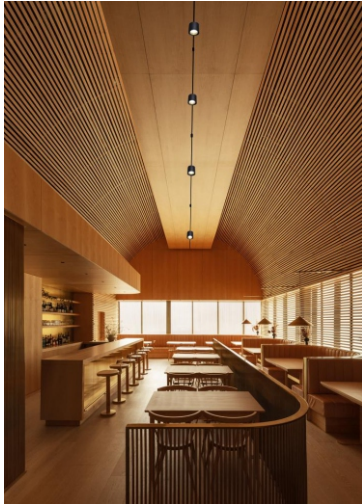


CQP-DW02-R72-12W



CQP-DW02-R92-18W


Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-DW02-R72-12W	12W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D72*H108mm
CQP-DW02-R92-18W	18W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D92*H130mm

# DC48V Color Bridge Series Light module - Spot Light

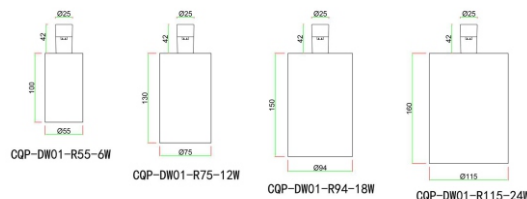


Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-DW01-R55-6W	6W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D55*H142mm
CQP-DW01-R75-12W	12W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D75*H172mm
CQP-DW01-R94-18W	18W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D95*H192mm
CQP-DW01-R115-24W	24W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D115*H202mm


## DC48V Color Bridge Series Light module - Strip Light



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
G18-100A-10W	10W	360°	Ra≥90	3000K/6000K	48V	White	IP20	D18L1000mm
G18-150A-14W	14W	360°	Ra≥90	3000K/6000K	48V	White	IP20	D18L1500mm
G18-200A-19W	19W	360°	Ra≥90	3000K/6000K	48V	White	IP20	D18L2000mm
G18-300A-27W	27W	360°	Ra≥90	3000K/6000K	48V	White	IP20	D18 L3000mm

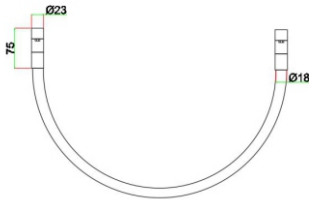

# DC48V Color Bridge Series Light module - Pendant Light



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
CQP-CD-04-6W	6W	45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Blue	IP20	D80*H120mm
CQP-CD-05-6W	6W	24°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Gray + Gold	IP20	D60*H120mm
CQP-CD-07-12W	12W	Adjustable 10°-55°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black or White	IP20	D100*H100mm
CQP-CD-06-6W	6W	50°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Gold	IP20	D100*H100mm



# Product Parameters

## --Sky Rail Series



## ➤ Sky Rail Series

- The Sky Rail series has a wider and thicker dimension, with six conductors inside and strong load-bearing capacity.
- It can be equipped with a dimming and color adjustment system, making it more suitable for commercial use.



### Sphere

**360° Diffusion lighting**  
distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.

### Spotlight



**Directed diffusion lighting**  
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.

**Accent lighting**  
emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



### Semisphere

**Directed diffusion lighting**  
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

### Linear Low UGR





**High-efficiency, low-glare general linear lighting**  
offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.


**High-comfort, low-glare general linear lighting**  
provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.




## ➤ Sky Rail components

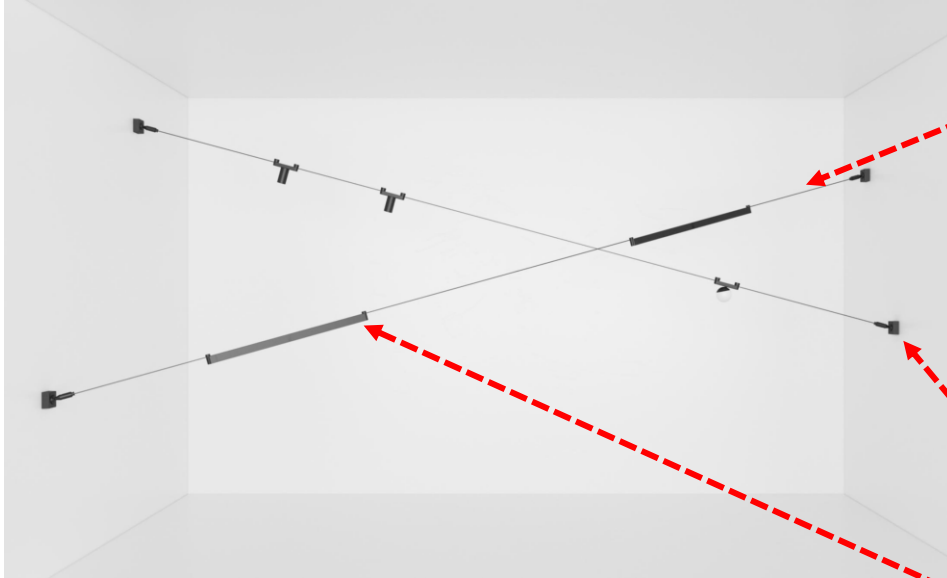


 Description: Sky Rail Flexible track  
 Item No.: DGX


 Description: Sky Rail fixed accessories  
 Item No.: TG-GDJ  
 Size: D26mm \*H46mm  
 Material : Aluminum  
 Function : When the hoisting length is long, it should be used with wire rope to reinforce and prevent droop.


 Description: Tighten  
 Item No.: TG-SJQ  
 Size: 86\*86\* ( 155-185 ) mm  
 Material: 304 steel+Aluminum



Various Lighting modules

- The Sky Rail system consists of three suites, none of which is necessary.
- Low Voltage DC24V/ 48V driver + Flexible Track+ Lamp Module




## Sky Rail Series Light module (Flood Light)



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-XTM-2J-D-20W	20W	100°	Ra≥90	3000K/3500K/ /4000K/5000K	48V	Black	IP20	502*26*57mm
TG-XTM-4J-D-40W	40W	100°	Ra≥90	3000K/3500K/ /4000K/5000K	48V	Black	IP20	933*26*57mm
TG-XTM-7J-D-70W	70W	100°	Ra≥90	3000K/3500K/ /4000K/5000K	48V	Black	IP20	1580*26*57mm
TG-XTM-9J-D-90W	90W	100°	Ra≥90	3000K/3500K/ /4000K/5000K	48V	Black	IP20	2011.5*26*57mm

## Sky Rail Series Light module (Grille Light)

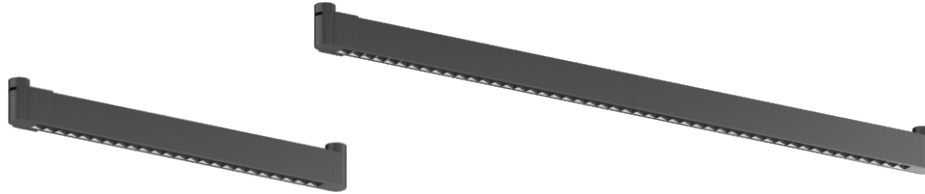

Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-XTD-R24T -D-20W	20W	24°/36°	Ra≥90	3000K/3500K /4000K/5000K	48V	Black	IP20	502*26*57mm
TG-XTD-R48T -D-40W	40W	24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	933*26*57mm
TG-XTD-R84T -D-70W	70W	24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	1580*26*57mm
TG-XTD-R108T -D-90W	90W	24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	2011.5*26*57mm

# Sky Rail Series Light module (Wall Washer Light)




Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-BXQD-21-6W	6W	24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L112*W23*H87mm
TG-BXQD-22-12W	12W	24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L220*W23*H87mm
TG-BXQM-11-6W	6W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L118*W23*H87mm
TG-BXQM-12-12W	12W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	L231*W23*H87mm

## Sky Rail Series Light module (Spot Light)



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-SP-011-12W	12W	15/24/ 36°	Ra≥90	3000K/3500K /4000K/5000K	48V	Black	IP20	D50*130mm
TG-SP-012-18W	18W	15/24/ 36°	Ra≥90	3000K/3500K/400 0K/5000K	48V	Black	IP20	D65*156mm
TG-SP-013-24W	24W	15/24/ 36°	Ra≥90	3000K/3500K/400 0K/5000K	48V	Black	IP20	D76*182mm

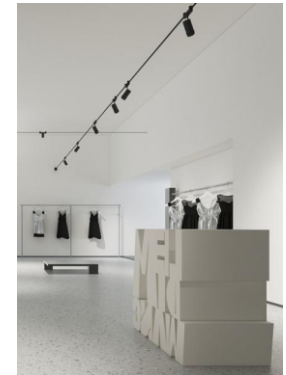


# Sky Rail Series Light module (Spot Light)



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-SP-021-6W	6W	15/24/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D45*100mm
TG-SP-022-12W	12W	15/24/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D55*115mm
TG-SP-023-18W	18W	15/24/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D65*135mm

# Sky Rail Series Light module (Multifunction Spot Light)




Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-SP-032-10W	10W	Adjustable 10°-55°	Ra≥90	3000K/3500K /4000K/5000K	48V	Black	IP20	D55*115mm
TG-SP-033-18W	18W	Adjustable 10°-55°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D65*135mm
TG-SP-062-SDA-6W	6W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D40*H100mm
TG-SP-063-SDA-12W	12W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D52*H120mm
TG-SP-064-SDA-18W	18W	15°/24°/36°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D63*H140mm




## Sky Rail Series Light module (Multifunction Spot Light)



Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
ZC-SP-69C-6W	6W	15°/24°	Ra≥90	3000K/3500K /4000K/5000K	48V	Outer White & Inner Black	IP20	D71 *50mm
ZC-SP-92C-9W	9W	15°/24°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Outer White & Inner Black	IP20	D94 *34mm
TG-HM-Y075-10W	10W	24°/50°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D75 *35mm
TG-HM-Y105-18W	18W	24°/50°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D105 *35mm

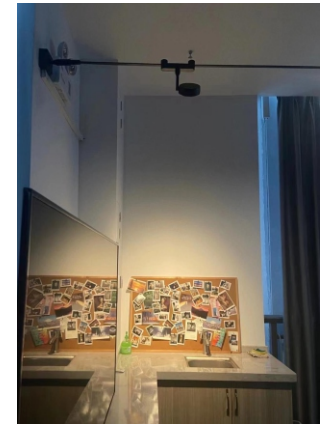


# Sky Rail Series Light module (Downlight)

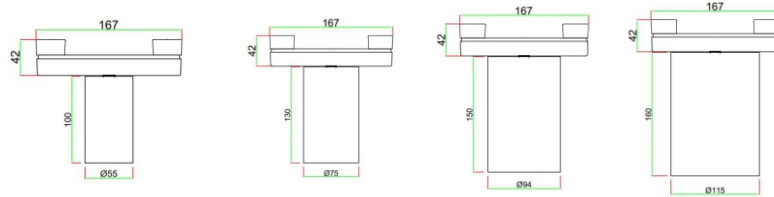

Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-DW01-R55-6W	6W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D55*100mm
TG-DW01-R75-12W	12W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D75*130mm
TG-DW01-R94-18W	18W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D94*150mm
TG-DW01-R115-24W	24W	15°/30°/45°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	D115*160mm




# Sky Rail Series Light module (Downlight)

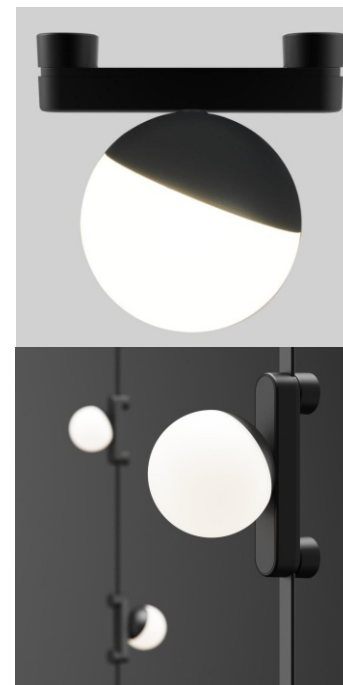


Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-DW02-R72-12W	12W	15°/24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D72*H108mm
TG-DW02-R92-18W	18W	15°/24°/36°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D92*H130mm
TG-YQ100Q-6W	6W	100°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D100*100mm
TG-YQ110S-12W	12W	24°	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D110*110mm




# Sky Rail Series Light module (Intercept Light)

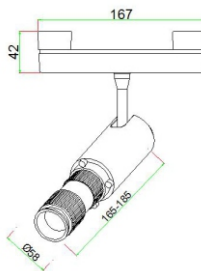

Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture Size
TG-CG-048-12W	12W	20-34° adjustable of lighting shape	Ra≥90	3000K/3500K/4000K/5000K	48V	Black	IP20	D48*185mm



# Sky Rail Series Light module - Pendant Light

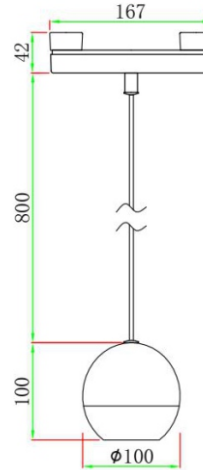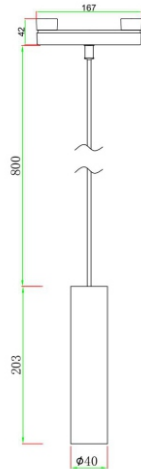

Item No.	Power	Beam angle	CRI	CCT	Output Voltage	Color	IP	Fixture size
TG-CD-01-5W	5W	24°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black	IP20	Fixture Size : Dia40 *203mm ( Wire 800mm - support retractable )
TG-CD-07-12W	12W	Adjustable 10°-55°	Ra≥90	3000K/3500K/ 4000K/5000K	48V	Black or White	IP20	D100 *100mm ( Wire 800mm - support retractable )